



Grupo Mexba
Básculas, Redes y Sistemas

Distribuidor Exclusivo:



Emplayadora Automatica

AW-4600eAT



Searching for

a New Balance

VENTAS Y SERVICIO
Tel: 58222958 y 01 800 841 2991
ventas.mexba@gmail.com
www.mexba.com.mx

Mexba


The AW-4600eAT realized the amenities of backroom operation while keeping total efficiency.

The new eco-friendly type drastically saves power consumption and reduces CO₂ emission of approximately 410kg a year. This is equivalent to the CO₂ amount absorbed by 29 cedar trees.*

* Calculated by the terms of 2000 packs/day, 12 hours/day, and 365 days based on "Act on promotion of global warming countermeasures", and "Green resources for global warming countermeasures" directed by Forestry Agency, Ministry of the Environment, Japan.

Effective label presentation

The optional POP Labeller (on the left) prints and applies a sales promotional label simultaneously with the main price label. This reduces time, labor, and wasted labels, which often results with manual application.

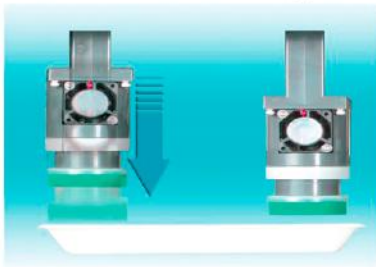


High productivity with proven quality

The super-stretching system allows dynamic film savings with a single roll of film. The system resolved the conflicting needs of high-speed processing capacity and attractive wrapping finish by sufficiently stretching the film to eliminate wrinkles.

Max. 36* packs/min.
 *The speed depends on commodity size.



Automatic process control

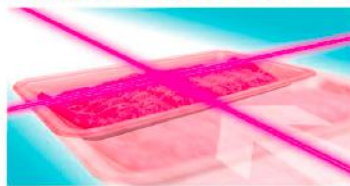

The system automatically determines the optimum wrapping conditions by adjusting the degree of film stretching on commodity size fed into the machine.

Specifications

Wrapping

Package size — Width: 130 - 380mm / 5.1 - 15 inches
 Height: 10 - 130*mm / 0.4 - 5.1 inches
 * 150mm as factory option
 Depth: 80 - 254mm / 3.1 - 10 inches
The maximum combination of the above dimensions is not available and available package size depends on the film width.

Wrapping speed — Max. 36 packages/min.
 Number of film roll — One roll
 Film width — 350 - 450mm / 14 - 18 inches
 Film length — Max. 1,500m

Weighing

Interval type	Multi-interval		Single interval
Capacity	Max. 6/15kg	Max. 3/6kg	Max. 30 lb
Scale interval	e=2/5g	e=1/2g	e=0.01 lb
Weighing range	40g - 15kg	20g - 6kg	0.20 - 30 lb
Max. wrapping capacity	5kg	5kg	11 lb

Labelling

Label type — Thermal paper
 Labelling application — Automatic label application
 Label size — Width: 40 - 80mm / 1.6 - 3.1 inches
 Length: 28 - 105mm / 1.1 - 4.1 inches

Console

Display panel — 10.4 inches TFT color
 Keypad — Pictogram or English

General

Externals — Resin and stainless steel construction
 Power source and power consumption — 208/240V; 3PHASE; 50/60Hz; 2.7kVA
 220-240V; 1Ø; 50/60Hz; 7.5A; 1.7kW
 Dimensions — 1410/55.5(W) × 1535/60.4(D) × 1465/57.7(H)
 mm/inches
 Net weight — Approx. 400kg (Single Labeller Type)
 Operation humidity — 90%RH (max.)

Options

- POP Labeller
- Second Labeller
- Bottom Labeller

Made in: Japan



Grupo Mexba
 Básculas, Redes y Sistemas

MEXBA REPRESENTANTE EXCLUSIVO:



**DISTRIBUIDOR EXCLUSIVO
 VENTAS Y SERVICIO**

E-mail: ventas.mexba@gmail.com
 Tel: 58222958 y 01 800 841 2991
 www.mexba.com.mx

Especificaciones Técnicas

MARCA	DIGI
MODELO	AW-4600eAT
DIMENSIONES DE EQUIPO	1.40 X 1.22= 1.70 m ²
CAPACIDAD	15kg
NUMERO DE PLAYOS	1
ANCHO DEL PLAYO (PULGADAS)	16"
FILM TAMANO DEL CORE (PULGADAS)	3" I.D.
TIPO DE PLAYO	PVC GRADO ALIMENTICIO
PAQUETES POR MINUTO	36
DETECCION DE TAMAÑO DE BANDEJA	AUTOMATICA
CONSUMO DE ENERGIA	1700W
DISPLAY	PANTALLA TFT TOUCH SCREEN A COLOR 10.4"
VOLTAJES DE ALIMENTACIÓN	220V/ 2 FASES
PESO DEL EQUIPO	396 kg
NUMERO DE IMPRESORES	HASTA 3 IMPRESORES
	1. ETIQUETA REGULAR (GAP)
	2. ETIQUETA DE PROMOCION POP
	3. ETIQUETA DE INGREDIENTES O TABLA NUTRICIONAL (ADICIONAL)
	CABEZA DE IMPRESIÓN DE (800mm) DE ANCHO
LIMPIEZA	FACIL DE LIMPIAR POR TENER DIMENSIONES MÁS PEQUEÑAS 1.40 X 1.22= 1.70 m ² . ESTO EVITARIA EL CULTIVO DE BACTERIAS Y LA CONTAMINACION DE LOS PRODUCTOS EMPACADOS
TIPO DE ETIQUETA	TERMICA DIRECTA
TAMAÑO DE ETIQUETA	ANCHO 40-80mm / 1.6"-3.1" LARGO 28-105mm / 1.1"- 4.1"
CORE DEL IMPRESOR PRINCIPAL	1.5" Y 2.5" (MAYOR CANTIDAD DE ETIQUETAS)
REFACCIONES	BAJOS PRECIOS
SEGURIDAD OPERATIVA	SEGURA
COMUNICACIÓN	LA VALIDACION DE COMUNICACIÓN CON BITACORAS DE FALLAS
MATERIALES DE CONSTRUCCIÓN	ACERO INOXIDABLE
FACTOR RUIDO	MUY SILENCIOSA



Grupo Mexba
Básculas, Redes y Sistemas

MEXBA REPRESENTANTE EXCLUSIVO:



DISTRIBUIDOR EXCLUSIVO
VENTAS Y SERVICIO

E-mail:ventas.mexba@gmail.com

Tel: 58222958 y 01 800 841 2991
www.mexba.com.mx